

CONTOPP®**KNOPP SPECIAL SCREED ANCHORS**

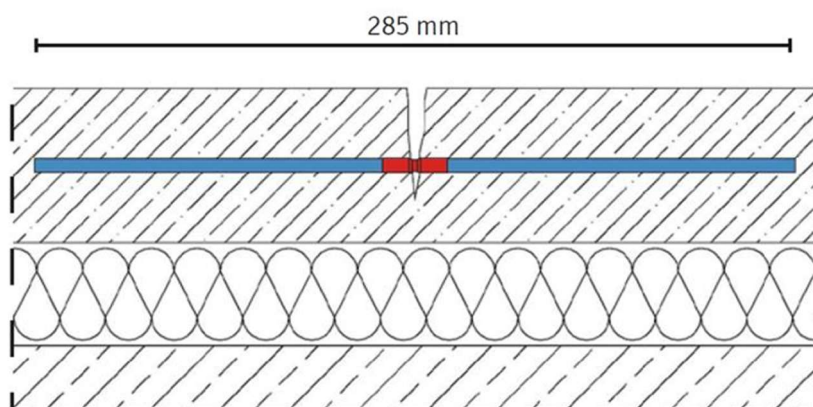
Adolf-Oesterheld-Str.1
D-97337 Dettelbach
Tel: +49(0)9324/9199-0
info@knopp-chemie.com
knopp-chemie.com

PROPERTIES**PRODUCT DESCRIPTION AND APPLICATION AREA**

The screed anchor with a round sliding sleeve is made from high-quality steel. It meets the requirements of DIN 18560-2 and BEB Information Sheet 4.11. The round, slip-on sliding sleeve accommodates movements of the screed. The screed anchor is designed to compensate for differences in height at the panel boundary joints and for variations in shrinkage and deformation behaviour at the edges of the screed sections on either side of the movement joints. The screed anchor is suitable for all types of screeds.

TECHNICAL DATA**CHARACTERISTICS**

Length:	285 mm
Diameter:	5.0 mm
Single-ended PP sliding sleeves	
Packaging/pack size:	250 pieces per box

**COMMENTS**

The raw materials we process and the products we produce are subject to strict factory inspections. Do not use products from other manufacturers when using this product. It is stressed that our products and the procedure must be tested for suitability for the expected construction site conditions. The quality of screeds is essentially influenced by the quality of sand and cement, the mixing rates and the processing in accordance with approved screeding technology. Since we have no control over site conditions or construction practices, no legal liability can be derived from this technical data sheet. Upon the publication all other previous copies shall become invalid.

Last updated: 24.09.2026